




DAEWOO MONITOR REPAIR KIT 42107

DISCLAIMER

These repairs should only be performed by Qualified Service Personnel as lethal voltages may be present. Not all problems may be corrected with the replacement of these parts. Observe the proper component orientation during installation.

1. Use this kit for DAEWOO Chassis 531X-VE AND 531X-MAIN.
2. Symptoms: No power, no video, weak or dim video.
 - a. Replace **Q505** with included transistor (either C5387, C5855 or J6812).
 - b. Replace **R547** with **0.68 Ohm 1Watt** resistor (BLUE, GRAY, SILVER, GOLD).
 - c. Replace **C105** with **330uF @ 25V** electrolytic capacitor.
 - d. Install **TVR1G** diode at location **D521**
 - e. Install **ERD07-15** diode at location **D502**.
 - f. Remove **C518** capacitor.

The schematic and manual for the DAEWOO monitors we use in our games are available on the web at: <http://www.arachnidinc.com/support/galaxyII>. The web address must be typed as shown.

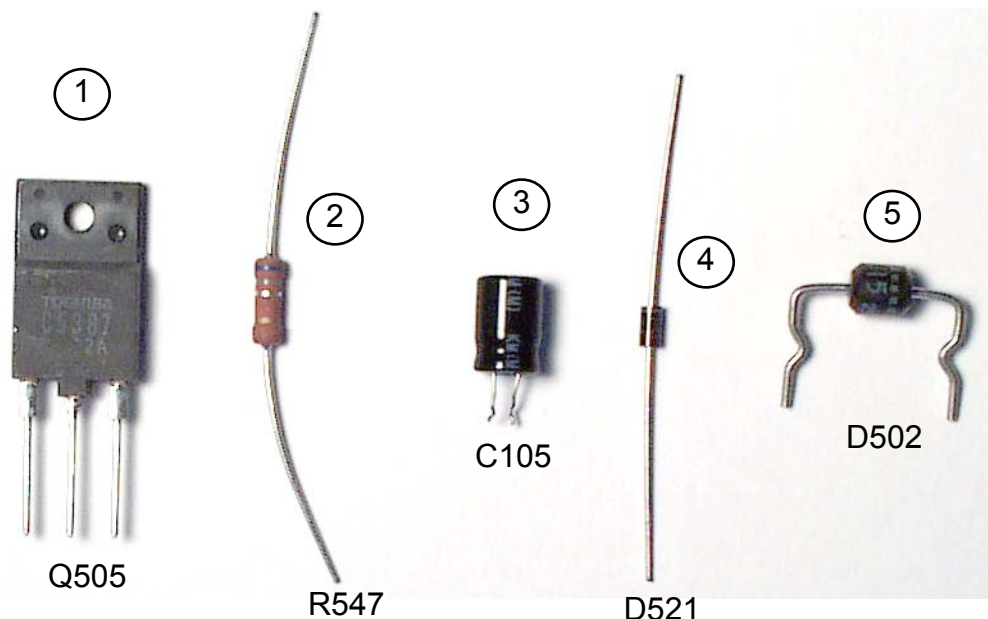

PARTS SHOWN CLOSE TO SCALE