




DAEWOO MODEL 531 MONITOR REPAIR KIT 42107

DISCLAIMER

These repairs should only be performed by Qualified Service Personnel as lethal voltages may be present. Not all problems may be corrected with the replacement of these parts. Observe the proper component orientation during installation.

1. Use this kit for DAEWOO Models: 531, 531B, 531X, 531XN.
2. Symptoms: No power, no video, weak or dim video.
 1. Replace **Q505** with **2SC5387**.
 2. Replace **R547** with **0.68 Ohm 1Watt** resistor (BLUE, GRAY, SILVER, GOLD).
 3. Replace **C105** with **330uF @ 25V** electrolytic capacitor.
 4. Install **TVR1G** diode at location **D521**
 5. Install **ERD07-15** diode at location **D502**.
 6. Remove **C518** capacitor.

The schematic and manual for the DAEWOO 531 monitor are available on the web at:
http://www.bullshooter.com/support/docs/531XSERVICE_MANUAL.PDF
The web address must be typed as shown.

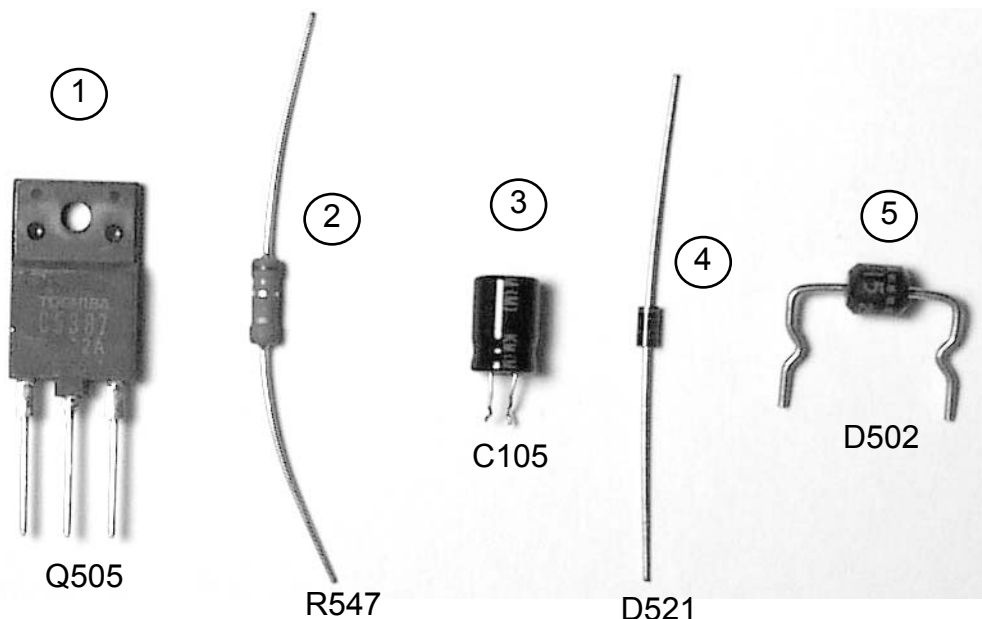

PARTS SHOWN CLOSE TO SCALE